

FOR SMD REWORK

# R-SYSTEM 1200

Tresky's Rework System **R-SYSTEM 1200** is a stand alone easy to use system for nearly all rework applications. The precise placement supported by a split optic gives the possibility to rework all common components.

Repeatable  
soldering profiles

Airflow down to 5l/min for  
smallest components

2 zone bottom heater

Easy to use

REWORK

R-SYSTEM 1200



# TRESKY

Dr. TRESKY AG

Switzerland

Email: [tresky@tresky.com](mailto:tresky@tresky.com)





[www.tresky.com](http://www.tresky.com)

## APPLICATIONS:

- $\mu$ BGA, BGA, CSP
- QFP
- QFN, MLF
- Passive
- Shieldings...

## FEATURES:

- Air flow top heater
- Infrared bottom heater
- Programmable profiles
- Split optic
- Auto zoom camera
- LED light

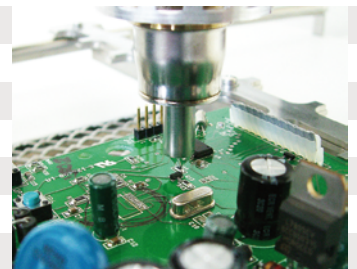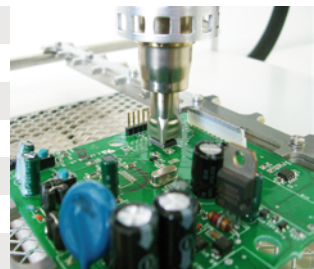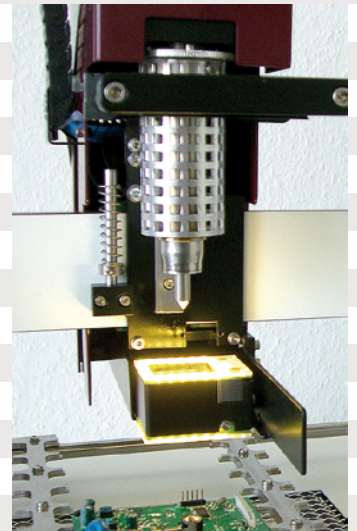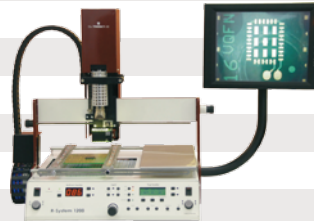

## TECHNICAL SPECIFICATION:

Working area:	340mm x 400mm / 13.4" x 16"
Max. Component Size:	50mm x 50mm
Travel Z-axis:	115mm
Camera auto zoom camera	
Split Optic	
Top heater power:	700W
Top heater temperature:	50°C - 550°C
Top heater air flow:	5l/min - 50l/min
Bottom heater:	1200W / 190mm x 245mm
Bottom heater temperature:	50°C - 400°C
Dimensions:	790mm x 600mm x 490mm
Voltage:	110V / 220V

Note: All specifications are subject to change without notice

## REPRESENTED BY:

### HEADQUARTERS

**Dr. TRESKY AG**  
Boehnirainstr. 13  
CH-8800 Thalwil  
Switzerland  
Tel.: +41 44 772 1941  
Fax: +41 44 772 1945  
tresky@tresky.com

**TRESKY Competence Center**  
Lange Enden 29  
D-13437 Berlin  
Germany  
Tel.: +49 30 683 208 92  
Fax: +49 30 683 208 94  
daniel.schultze@tresky.com

**TRESKY Corporation**  
704 Ginesi Drive, Suite 11A  
Morganville, NJ 07751  
USA  
Tel.: +1 732 536 8600  
Fax: +1 732 536 0495  
sales@tresky.com

[www.tresky.com](http://www.tresky.com)

